

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- Two-year limited warranty covers all systems and components.
- Industrial diesel engine.
- Single-bearing alternator with class H insulation.
- Fully programmable digital AVR.
- MAUX winding for excellent motor starting capability.
- 45°C (122°F) ambient radiator.
- Subbase fuel tank.
- Vibration isolators.
- Dry type air filter.
- Fuel water separator.
- Main line breaker.
- Starting battery with in-built battery charger and cables.
- CPCB-certified sound enclosure.
- Conveniently located fuel level indication and fuel filling point.
- Single point lifting arrangements.
- Operation and installation literature.

Generator Set Ratings

Genset	Engine	Alternator	Voltage	PH	Hz	Prime Rating	
						kW/kVA	Amps
KE15	G15	ECP3-3L/4	240/415	3	50	12/15	20
KES15	G15	ECP28-2LN/4	240	1	50	12/15	62.5

PRIME POWER RATINGS: Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528/1, overload power in accordance with ISO-3046/1 and BS 5514. For limited running time and base load ratings, consult the factory. Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Specifications

- Alternator meets BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359.
- Self-ventilated and dripproof of IP23 construction.
- Superior voltage waveform form a 2/3 pitch wound stator.
- Sustained short circuit current of upto 300% of the rated current for upto 20 seconds.

Specifications	Alternator
Type	4 Pole
Exciter type	Brushless
Leads, quantity type	12, Reconnectable
Voltage regulator	DSR
Insulation	
- Material	Class H
- Temperature rise, Prime	125°C
Bearing: quantity, type	1, Sealed
Coupling	Flexible Disc
Voltage regulation	<+/-1%
Prime at 125°C, kVA	15
Direct axis subtransient reactance (X"d)%	9.10

Application Data

Engine

Engine specifications

Engine model	G15
Engine type	Natural Aspiration
Cylinder arrangement	2, inline
Displacement, L (cu. in.)	1.96 (119.6)
Bore and stroke, mm (in.)	102 x 120 (4.02 x 4.72)
Compression ratio	17.5:1
Piston speed, m/min. (ft./min.)	180 (590.55)
Rated rpm	1500
Max.power at rated rpm, kWm (BHP)	17.6 (23.6)
Governor: type	Mechanical, MICO vertical in-line
Frequency regulation, no-load to full load	ISO 5%
Frequency regulation, steady state	+/- 2.5%
Frequency, Fixed, Hz	50
Air cleaner type, all models	Dry

Exhaust

Exhaust System

Exhaust Manifold type	Dry
Exhaust flow at rated kW, kg/hr	96.5
Exhaust temperature at rated kW, dry exhaust, °C (°F)	550 (1022)
Maximum allowable back pressure, kPa (in.Hg)	5 (1.48)
Exhaust outlet size at engine hookup, mm (in.)	40 (1.57)

Engine Electrical

Engine Electrical System

Starter motor rated voltage, VDC	12
Battery, recommended cold cranking amps (CCA) :- - Qty., CCA rating above 0°C (32°F)	1, 500
Battery voltage, VDC	12

Fuel

Fuel System

Fuel supply line, min. ID, mm (in.)	6 (0.23)
Fuel return line, mm. ID, mm (in.)	4 (0.15)
Fuel prime pump	MICO/Bosch
Fuel filter: quantity, type	1, Dual element
Recommended fuel	#2 Diesel
Fuel tank capacity, L	93

Lubrication

Lubricating System

Type	Full flow
Oil pan capacity, L (qt.)	6 (6.34)
Oil pan capacity with filter, L (qt.)	6.5 (6.86)
Oil filter: quantity, type	1, Spin on

Application Data

Cooling

Radiator System	
Ambient temperature, °C (°F)	45 (113)
Engine jacket water capacity, L (gal.)	3.2 (0.7)
Radiator system capacity, including engine, L (gal.)	6.9 (1.52)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	18.07 (1028)
Water pump type	Impeller
Fan diameter, including blades, mm (in.)	406.5 (16)
Fan, kWm (HP)	0.55 (0.75)

Operation Requirements


Air Requirements	
Radiator-cooled cooling air, m ³ /min (scfm)	65 (2292)
Combustion air, kg/hr	92
Heat rejected to ambient air : Generator, kW (Btu/min.)	2.85 (162)

Fuel Consumption (Density @ 0.85 kg/m ³)	
Diesel, Lph at % load	Prime Rating
100%	4.0
75%	3.0
50%	2.2

Exhaust Emissions	
Per ISO 8178-5 mode cycle	CPCB norms

Noise Level	
Noise level	Conforms to CPCB norms

Controller



Advanced Digital Control (ADC 2200)

LCD display:

- Runtime hours
- Current
- Voltage
- Frequency
- Engine temperature
- Engine oil pressure
- Battery V
- kW
- kVA

LCD display faults:

- High engine temperature
- Low oil pressure
- Over load
- Overspeed
- Over & under voltage
- Over & under frequency
- E-stop
- Auxiliary fault

Display warning:

- Low battery voltage
- High battery voltage
- Low fuel level

Standard Features and Accessories

Standard Features

- Mode selection: Auto/Manual/Test
- Mode selector switch
- Remote start capability (1 wire negative)
- Event log
- Superior electronics
- Factory-built and production-tested
- One-source responsibility for the generating system and accessories
- Automatic start with programmed cranking cycle
- Field software upgrade possibility

Environmental Specifications

- Operating temperature: -10°C to 60°C (-14°F to 140°F)
- Storage temperature: -60°C to 70°C (-76°F to 158°F)
- Humidity: 0-95% condensing

Power Requirements

- 12 or 24 VDC with fuse protection
- 120 mA @ 12 VDC
- 60 mA @ 24 VDC

Accessories


- Mains sensing relay
- Earth leaking protection

KOHLER CO., Kohler,
Wisconsin 53044 USA
Phone 920-565-3381,
Fax 920-49-1646
KohlerPower.com




Kohler India Corporation Pvt.Ltd
#138/6, 6th 'A' Cross
Raj Mahal Vilas Extension Sadashivnagar
Bangalore 560 080, India
Phone +91 80 2361 6208 / 6831 / 0231
Fax +01 80 2361 5972
E-mail: info@kohlerindia.com

Dimensions and Weights

Overall Size, L x W x H, mm (in.)	1997 x 950 x 1508 (78.6 x 37.4 x 59.4)
Wet, max., kg (lb.)	925 (2039.3)
Dry, max., kg (lb.)	775 (1708.6)

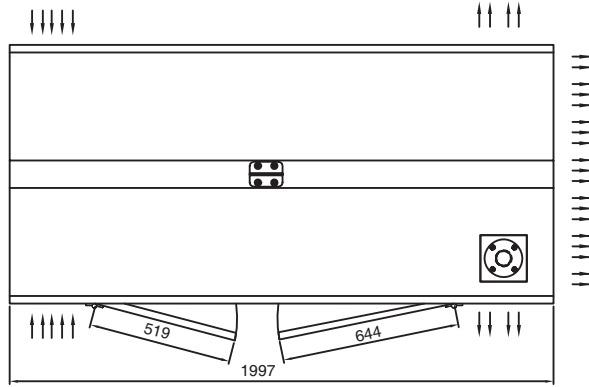

TOP VIEW

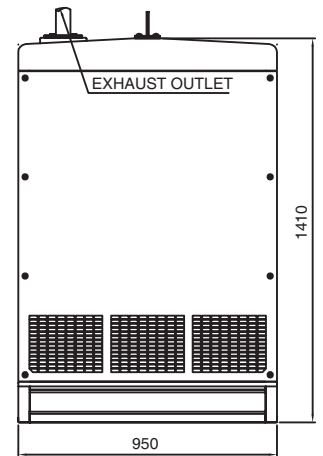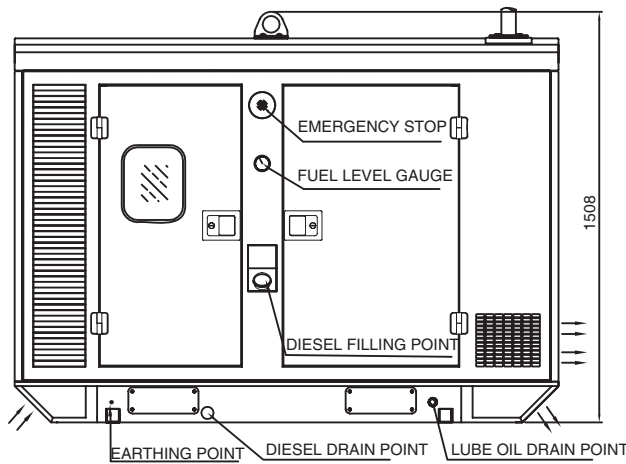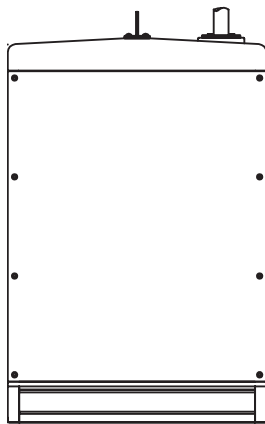

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY:

© 2011 by Kohler Co. All rights reserved.