


Model: KK05

KOHLER POWER SYSTEMS

Diesel

ISO 9001
KOHLER
POWER SYSTEMS
NATIONALLY REGISTERED

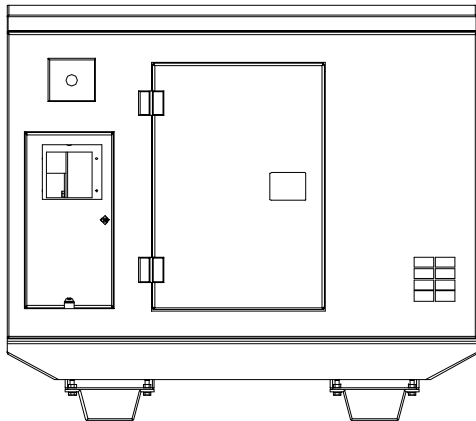

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories
- The generator set and its components are prototype-tested, factory-built, and production-tested
- One-year limited warranty covers all systems and components
- Air cooled Diesel Engine
- Single-bearing alternator with class H insulation.
- Subbase fuel tank (8hrs @ 80% rated load).
- Vibration isolators.
- Dry type air filter
- Fuel Filter single stage
- Main line breaker
- Starting battery and cables
- CPCB-certified sound enclosure
- Operation and installation literature

Generator Set Ratings

Genset	Engine	Voltage	PH	Hz	Prime Rating	
					kW/kVA	Amps
KK05	15LD440	230	1	50	4/5	21.7

PRIME POWER RATINGS: Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528/1, overload power in accordance with ISO-3046/1 and BS 5514. For limited running time and base load ratings, consult the factory. Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Specifications

- Alternator meets BS EN 60034 and the relevant section of other international standards such as Bs5000, VDE 0530, IEC34, CSA C22.2.
- Self-ventilated and drip proof of IP21/23 construction

Specifications	Alternator
Type	2 Pole
Exciter type	Brushless
Insulation	
- Material	Class H
Bearing: quantity, type	1, Sealed

Application Data

Engine

Engine Specifications

Engine model	15LD440
Engine type	Natural Aspiration, IDI
Cylinder arrangement	1
Displacement, L (cu. in.)	0.44 (26.85)
Bore and stroke, mm (in.)	76 x 86 (2.99 x 3.38)
Compression ratio	20.3 : 1
Rated rpm	3000
Max. power at rated rpm, kWm (BHP)	6.1(8.18)
Governor: type	Mechanical
Frequency regulation, no-load to full load	Class A2
Frequency regulation, steady state	ISO 8528 G2
Frequency, Fixed, Hz	50
Air cleaner type, all models	Dry

Exhaust

Exhaust System

Exhaust manifold type	Dry
Exhaust flow at rated kW, LPM	1920
Exhaust temperature at rated kW, dry exhaust, °C (°F)	700 (1292)
Maximum allowable back pressure, kPa (in.Hg)	4 (1.20)
Exhaust outlet size at engine hookup, mm (in.)	40 (1.57)

Operation Requirements

Air Requirements

Combustion air, LPM	530
---------------------	-----

Noise Level

Measured at 1m per CPCB norms, db(A)	CPCB norms
--------------------------------------	------------

Engine Electrical

Engine Electrical System

Starter motor rated voltage, VDC	12
- Qty.	1
Battery voltage, VDC	12
Battery Charger	12V, 5 Amps

Fuel

Fuel System

Fuel supply line, min. ID, mm(in.)	5
Fuel return line, mm. ID, mm(in.)	5
Fuel prime pump	Manual
Fuel filter: quantity, type	1
Recommended fuel	#2 Diesel
Fuel tank capacity, L	15

Lubrication

Lubricating System

Type	Full pressure
Oil pan capacity, L (qt.)	1.2 (1.26)
Oil filter: quantity, type	1

Fuel Consumption

Diesel, Lph (gph) at % load @ 0.8 Pf	Prime Rating
100%	1.4 (0.37)
75%	1.0 (0.26)
50%	0.7 (0.18)

Exhaust Emissions


Per ISO 8178-5 mode cycle	CPCB norms
---------------------------	------------

Controller

Advance Digital Control (ADC 2200) Compact Controller

LCD display:

- Runtime hours
- Current
- Voltage
- Frequency
- Engine Temperature (Digital I/P)
- Engine oil pressure (Digital I/P)
- Battery V
- Fuel level



LCD display faults:

- High engine temperature
- Low oil pressure
- Overspeed
- Over & under voltage
- Over & under frequency
- E-stop
- Auxiliary fault
- Low fuel level
- Over load

Display warning:

- Low battery voltage
- High battery voltage
- Low fuel level

Standard Features and Accessories

Standard Features

- Master switch: Run/Off-Reset/Auto
- Current selector switch
- Remote two-wire start/stop capability
- Superior electronics
- Factory-built and production-tested
- One-source responsibility for the generating system and accessories

Environmental Specifications

- Operating temperature: -10°C to 60°C (14°F to 140°F)
- Storage temperature: -60°C to 70°C (-76°F to 158°F)
- Humidity: 0-95% condensing

Power Requirements

- 12 or 24 VDC with fuse protection
- 120 mA @ 12 VDC
- 60 mA @ 24 VDC


Dimensions and Weights

Overall Size, L x W x H, mm (in.):


945 x 660 x 836 (37.2 x 26 x 32.9)

Weight: Wet, max., kg (lb.):


240 (529)

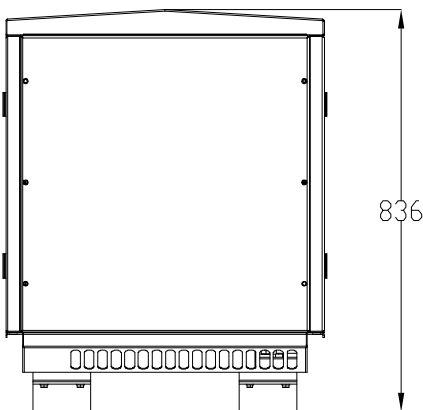

LHS view

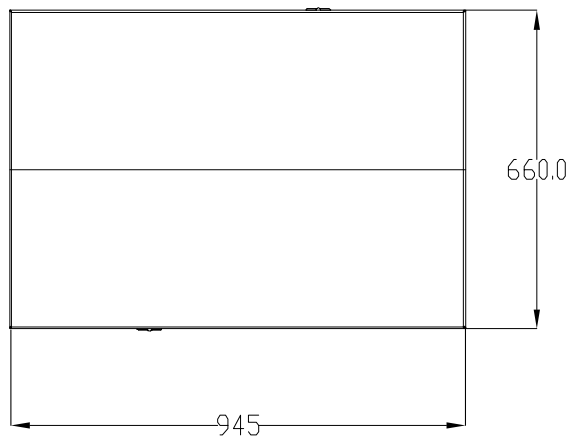

TOP view

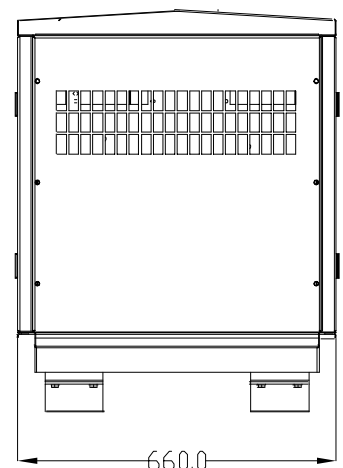

RHS view

KOHLER CO., Kohler
Wisconsin 53044 USA
Phone 920-565-3381
Fax 920-49-1646
kohlerpower.com

Kohler India Corporation Pvt Ltd
#138/6, 6th A Cross
Raj Mahal Vilas Extension, Sadashivnagar
Bangalore 560080, India
Phone +91 80 2361 6208 / 6831 / 0231
Fax +91 80 2361 5972
E-mail: info@kohlerindia.com